

BombardierDash2019

Table of contents

Requirements 3

Description 3

Bench connection 4

Requirements

Requirements:

- UHDS
- BB0001 activation
- Cable bench connection

Description

Available options

- Read Km
- Write Km
- Read Config
- Write Config
- Write Flash

Write km if want to set km higher as present works very fast without flash dasboard

If we want to set lower km dashboard is automatically flash two times. Very important is finish procedure with 2 flash operation.

All of this process is carried out automatically. If at flash something go wrong software ask as for repeat.

Please do not interrupt process before all end with with success.

If after frst flash you finish procedure and disconnect dash - result will be 0Km on display and no possible to set km.

In this case dashboard required reflash dashboard with flash file (we not provide service of distribute flash file).

When software ask disconnect power (15) mean constance power on pin(30) must stay be on only we need to switch power (15).

All is showed on picture.

if after first flash you get error at second flash please dicoencte power and press button repeat.


Never press cancel before finish success all procedure because dashboard will stay in service state

At write km when dashboard SW is not suported soft ask you do ou want continue.

But this is risk opeartion and dashboard can works not properly. You can do only on your risk !!!!

Bench connection

Can-AM 2019... 70F3554

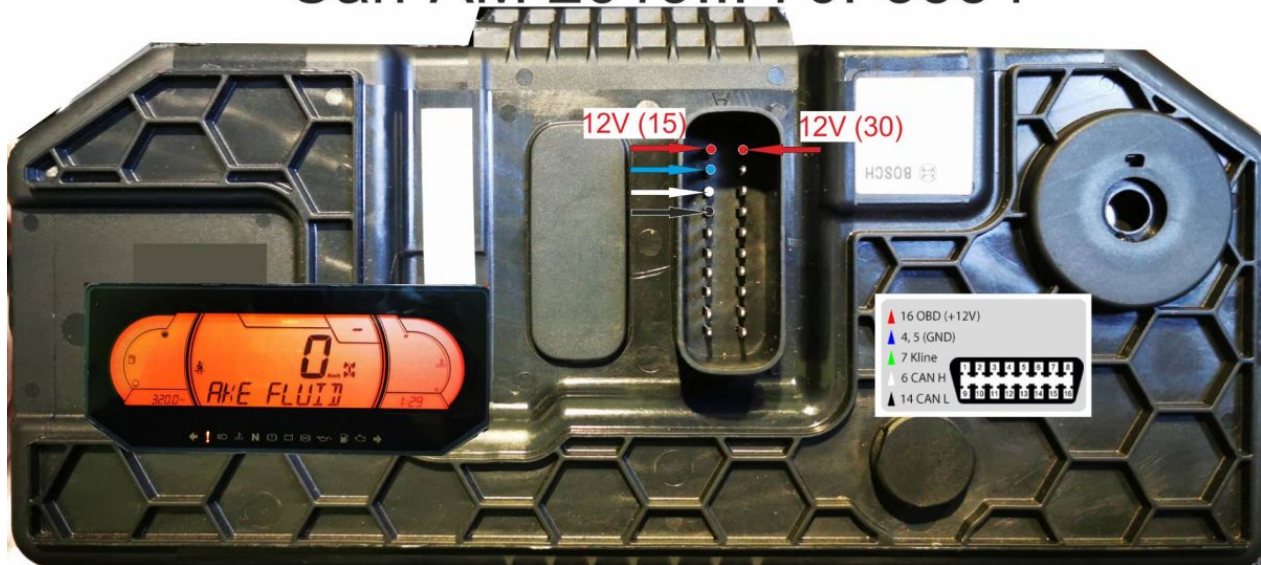

+12V(15) - this wire must be switched
when soft prompt it

+12V(30) - this wire must power all time