

Kia_Sorento_Virtual_RH85 0_Continental

Table of contents

Getting Started	3
System requirements	3
Getting help	3

Getting Started

System requirements

Kia Sorento Virtual Continental RH850 (R7F701434)

Required:

UHDS Interface with SN 8800 or higher (additionally must be installed CAN FD chip in UHDS)

Jtag programmer

Licence JG0025 (Jtag)

Licence KA0017


Getting help




Change Km value is possible by CAN (dash connector)
First required is prepare MCU by Jtag.

1. Connect Jtag as on picture PIC.1 .
Solder 2 points together as on PIC.3
Connect UHDS and Jtag to your computer ,power dash from power supply, select "Sorento R7F701434 Cont. Virtual 2021..." and press button "Prepare Flash".
When it finish success you can desolder Jtag wries.
2. Connect UHDS to dash connector as on picture pic.3. Press write Km.


PIC1

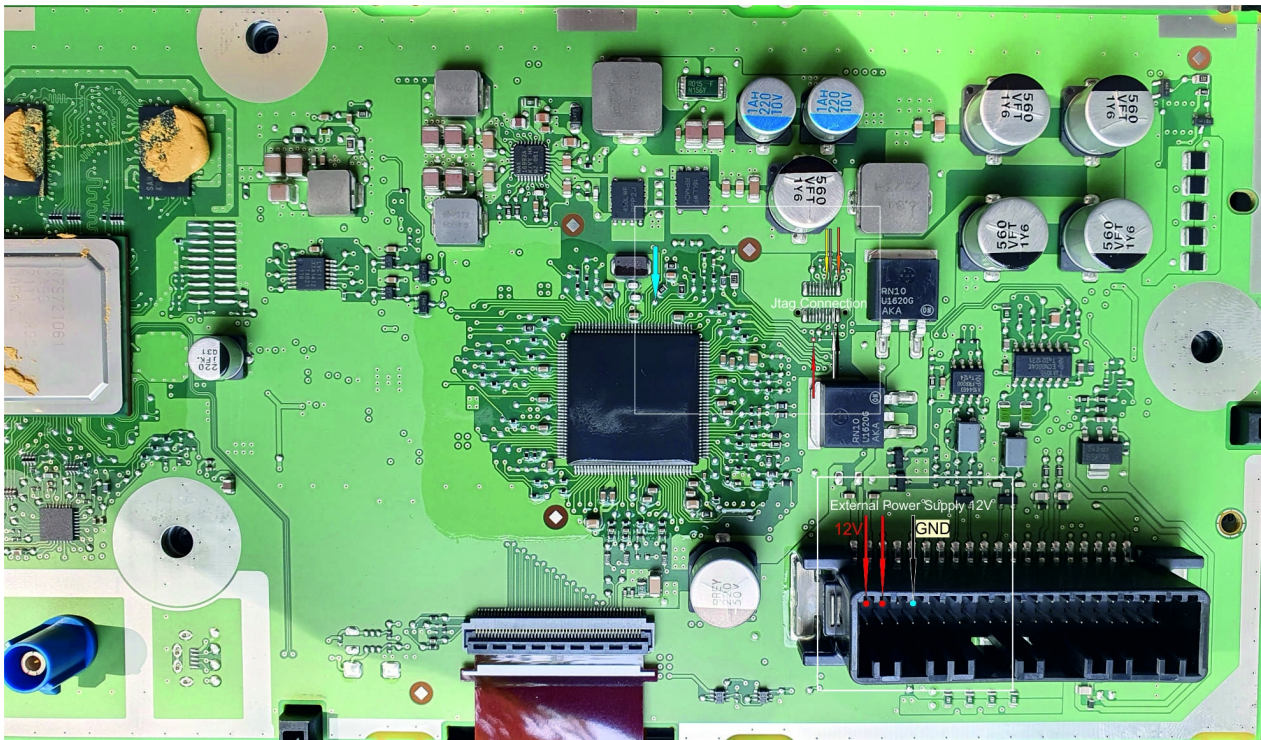

PIC2

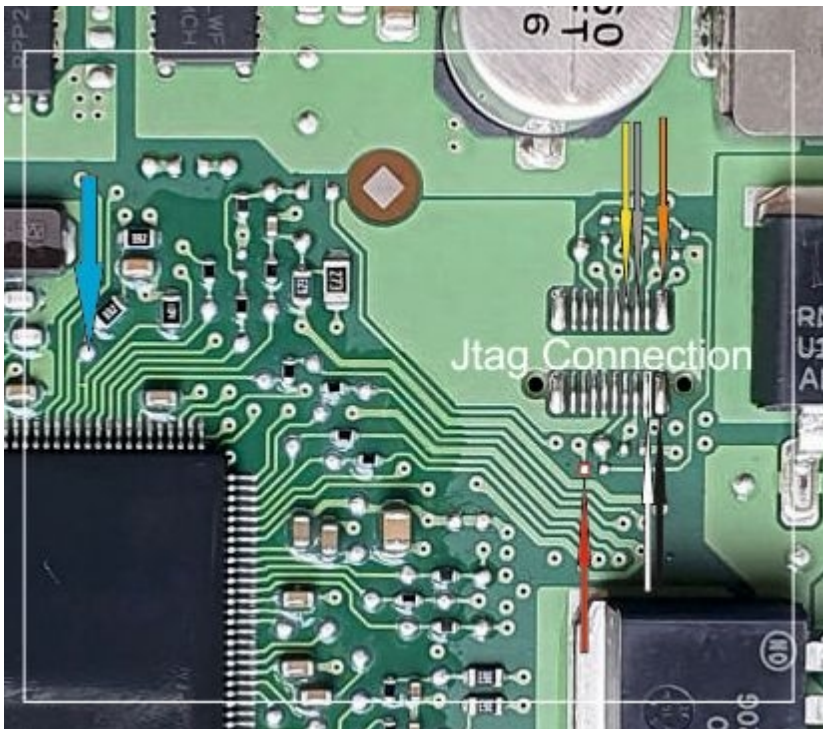

PIC23

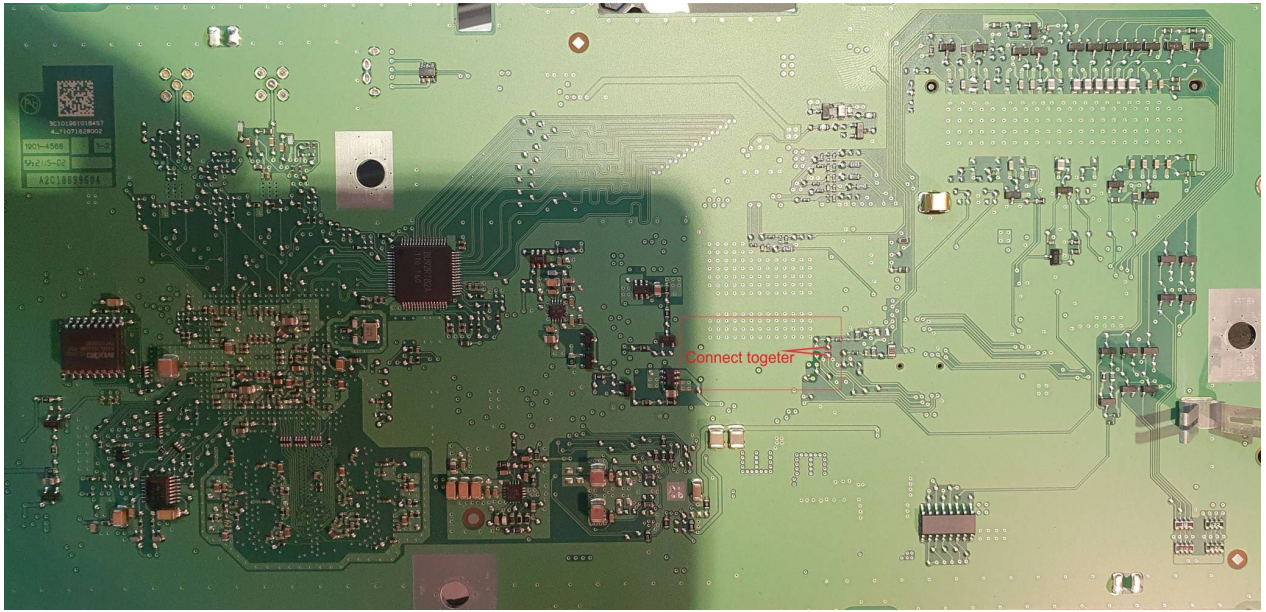

PIC3

