

Kia_s6J324_Digital_2021

Table of contents

Getting Started	3
System requirements	3
Getting help	3
Board Version1	3
Jtag Mode	3
Board Version2	4
Jtag Mode	4

Getting Started

System requirements

Requirements:

UHDS Tool

Jtag Tool (only if version not added yet by Dash connector)

Activation KA0022

Activation JG0047 (only if version not added yet by Dash connector)

Getting help

Available options :

Read KM (dash connector)

Write KM (dash connector - on unlocked Dash)

Write Flash (dash connector)

Unlock Dash (dash connector or Jtag)

Write Km:

This operation only possible on unlocked dash.

When we press write KM dashboard automatically check version and if Flash is available for our dash software do all automatically (unlock dash and write km)

In case when SW is not available UHDS ask open flash file from local disk. Press button "Cancel"

Now solder wires as on picture , connect 12v to dash connector and press button Read Flash Jtag. After finish save file.

Now press button "Write KM" again and when soft ask flash file please select file what you read in previous step.




Program finish procedure automatically.

We have 2 board versions you must choose proper version for solder wires to your dashboard.

Board Version1

Jtag Mode

Kia ,Hyundai ver1 S6J324 Jtag Connection 5V

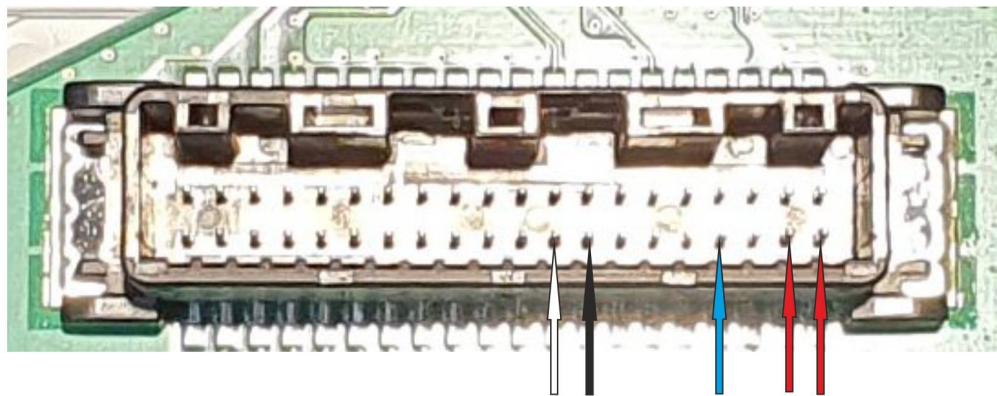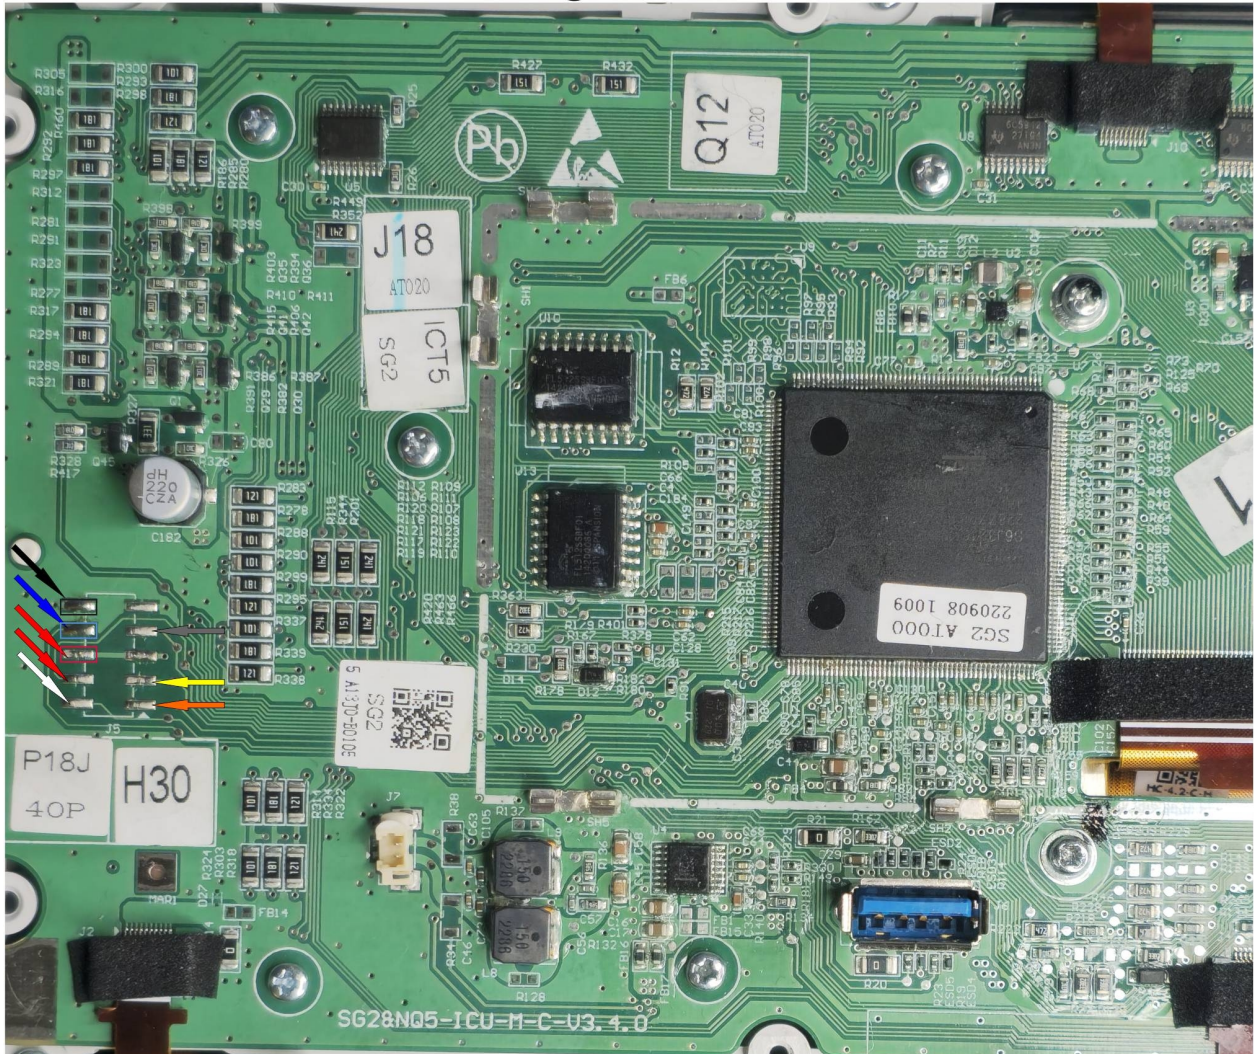

Board Version2

Jtag Mode

Kia ,Hyundai ver2 S6J324 Jtag Connection 5V

